



# PPC10M

10.4" High Performance Panel PC (Pentium M and Celeron M)



- |                        |                               |
|------------------------|-------------------------------|
| 1. RS-232 Conn.        | 7. PS/2                       |
| 2. USB                 | 8. DC-IN Power Jack           |
| 3. RJ-45               | 9. Brightness Adjustment Knob |
| 4. USB                 | 10. Power Reset Button        |
| 5. Parallel Port (LPT) | 11. Power On Button           |
| 6. DVH Conn.           |                               |

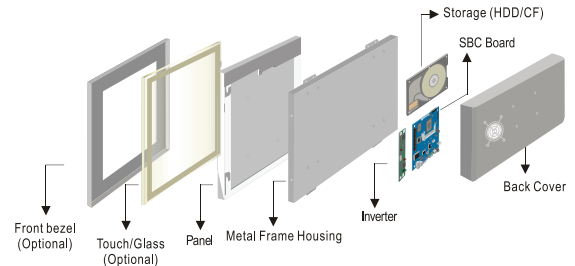

## SPECIFICATIONS

### TFT CHARACTERISTICS

Resolution	800 x 600
Contrast Ratio	500:1
Brightness	350 cd/m <sup>2</sup>
Viewing Angle	-60~60(H); -60~40(V)
Max Colors	262, 144

### SBC SPECIFICATIONS

Processor	Socket 479 for Intel Pentium M / Celeron M up to 2 GHz
BIOS	Award 4Mbit Flash
System Chipset	Intel 855GME + ICH4
Memory Slot	1 x DIMM, Max 1GB DDR 200/266/333
Graphic Chipset	Intel 855GME Integrated (64MB shared)
IDE	2 x IDE (UDMA 33/66/100)
CF	1 x Type 1 CF socket
KB/Mouse	2 x PS/2
Ethernet	1 x RJ-45
Audio	Built in AC97 codec
USB	6 x USB2.0
Serial	2 x RS232

# PPC10M

10.4" High Performance Panel PC (Pentium M and Celeron M)

## SPECIFICATIONS

SBC SPECIFICATIONS CONT.	
Parallel	1 x LPT
IrDA	1 x IrDA
1394 FireWire	2 x 1394
Expansion Slot	1 x Mini PCI, 1 x PCI*
POWER SPECIFICATIONS	
Power Input	12V DC IN (Lockable Power Jack)
Power Consumption	65W (typ.) (Max. backlight & high CPU load)
ENVIRONMENTAL SPECIFICATIONS	
Operating Temperature	0°C to 50°C
Humidity	30% to 90% (non condensing)
OUTPUT CONNECTORS	
Ethernet LAN	1 x RJ45-10/100Mbps
Keyboard / Mouse	1 x PS/2
COM	1 x RS232 9P DSUB (male)
Parallel	1 x 25P DSUB (female)
USB	2 x USB Type-A Receptacle
1394 Firewire	2 x 1394 6P Receptacle
DVI out	1 x DVI-I (female)