



PPC20M

20.1" High Performance Panel PC (Pentium M and Celeron M)



- | | |
|------------------------|-------------------------------|
| 1. RS-232 Conn. | 7. PS/2 |
| 2. USB | 8. DC-IN Power Jack |
| 3. RJ-45 | 9. Brightness Adjustment Knob |
| 4. USB | 10. Power Reset Button |
| 5. Parallel Port (LPT) | 11. Power On Button |
| 6. DVI Conn. | |

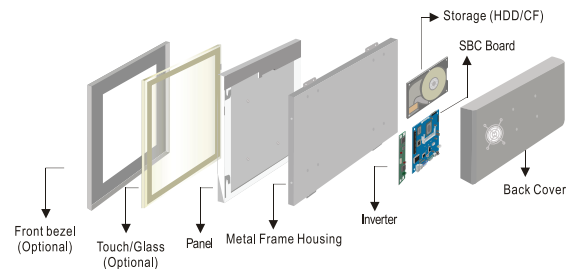

SPECIFICATIONS

TFT CHARACTERISTICS

Resolution	1600 x 1200
Contrast Ratio	1000:1
Brightness	300 cd/m ²
Viewing Angle	-89~89(H); -89~89(V)
Max Colors	16.7M (8 bits/colors)

SBC SPECIFICATIONS

Processor	Socket 479 for Intel Pentium M / Celeron M up to 2 GHz
BIOS	Award 4Mbit Flash
System Chipset	Intel 855GME + ICH4
Memory Slot	1 x DIMM, Max 1GB DDR 200/266/333
Graphic Chipset	Intel 855GME Integrated (64MB shared)
IDE	2 x IDE (UDMA 33/66/100)
CF	1 x Type I/II CF socket
KB/Mouse	2 x PS/2
Ethernet	1 x RJ-45
Audio	Built in AC97 codec
USB	6 x USB2.0
Serial	2 x RS232

PPC20M

20.1" High Performance Panel PC (Pentium M and Celeron M)

SPECIFICATIONS

SBC SPECIFICATIONS CONT.	
Parallel	1 x LPT
IrDA	1 x IrDA
1394 FireWire	2 x 1394
Expansion Slot	1 x Mini PCI, 1 x PCI*
POWER SPECIFICATIONS	
Power Input	12V DC IN (Lockable Power Jack)
Power Consumption	101W (typ.) (Max. backlight & high CPU load)
ENVIRONMENTAL SPECIFICATIONS	
Operating Temperature	0°C to 50°C
Humidity	30% to 90% (non condensing)
OUTPUT CONNECTORS	
Ethernet LAN	1 x RJ45-10/100Mbps
Keyboard / Mouse	2 x PS/2
COM	1 x RS232 9P DSUB (male)
Parallel	1 x 25P DSUB (female)
USB	2 x USB Type-A Receptacle
1394 Firewire	2 x 1394 6P Receptacle
DVI out	1 x DVI-I (female)